

DOBAU®

-Nageldichtband DSK



DOBAU®- Nail Sealing Tape DSA (formerly ISO- Nail selaing tape DSK)

Two-sided, cold self-adhesive, carrier-free elastomeric

Use

The DOBAU®- Nageldichtband DSK is a two-sided, cold self-adhesive, carrier-free elastomeric tape based on polymer bitumen for selaing nail joints in the roof area.

Properties

The DOBAU®- Nageldichtband DSK is a two-sided, cold self-adhesive, which is glued between the underlay and the counter batten. For better handling during processing, the separating materials are wider than the adhesive layer.

Technical data

Thickness:	2 mm ± 0,2 mm
Length:	10 m
Width:	50 mm, 60 mm, 70 mm, 80 mm
Application temperature:	from + 5 °C
Temperature resistance:	-20 °C till +80 °C
Shelf life:	at least 1 year (cool and dry)
Durability:	10 years

Application instructions

The DOBAU®- Nageldichtband DSK is glued on the underlay in counter batten area. Afterwards the battens are applied and nailed. Nail punches are sealed by elastic behavior of nail sealing tape in retrospect. An application temperature over 5 °C is recommend. When applied in cold weather DOBAU®- Nageldichtband DSK should be stored in warm condition of > 10 °C for 12 hours.

Application temperature

from approx. 5 °C

When applied in cold weather, the nail sealing tape should be stored in an environment with > 10 °C for at least 12 hours.

Storage


The product should be protected from direct sunlight and stored at 10 °C to 30 °C.

Central Sales

Dortmunder Gußasphalt GmbH & Co. KG


✉ Am Hafenbahnhof 10 ■ 44147 Dortmund ■ Germany

☎ +49 231 395797 - 37 @ info@dga.de 🌐 www.dga.de

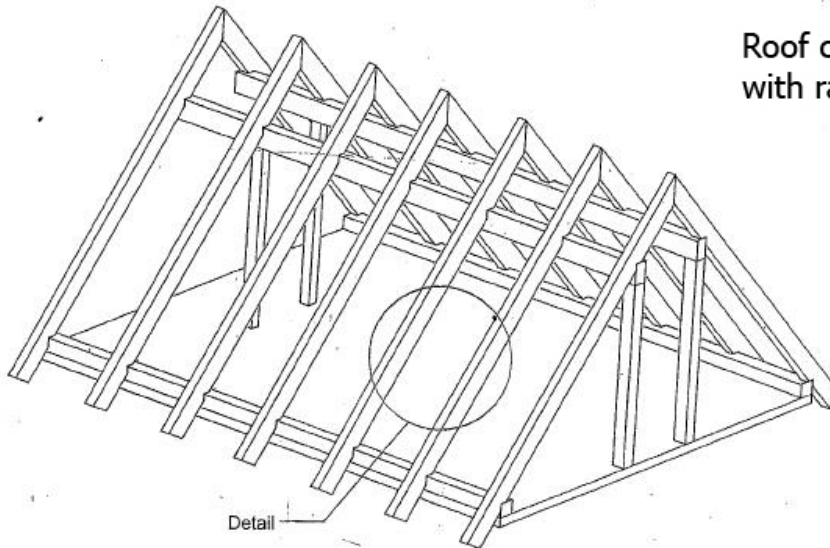

Detail

Installation of the nail sealing tape

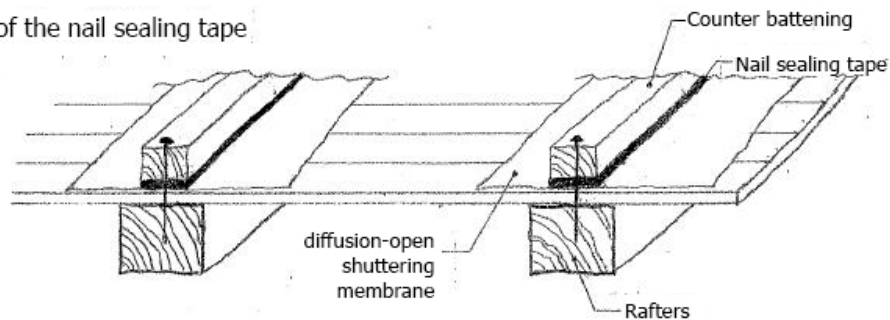

This product information corresponds to our latest available information. The processor is obliged to test the suitability and application options for the intended purpose. We shall be pleased to advise if you have any questions about our product. Our Terms and Conditions of Business apply, which can be found at www.dga.de.

Rev.: 03/23

Central Sales

Dortmunder Gußasphalt GmbH & Co. KG

✉ Am Hafenbahnhof 10 ■ 44147 Dortmund ■ Germany

☎ +49 231 395797 - 37 @ info@dga.de 🌐 www.dga.de