




DOBAU®- Decking Tape

Single-sided adhesive bitumen tape to protect against contact corrosion on wooden terraces.

Product description

DOBAU®- Terrassenband (DOBAU®- Decking Tape) is a self-adhesive, cold-applied waterproofing tape specifically developed to protect decking substructures from water penetration and rot. The top layer of the tape is made of UV-stable aluminum. The self-adhesive bitumen sealing compound underneath complies with the DTU 51.4 guideline for exterior wooden decking. When installed, the compound penetrates the substructure together with the screw and seals the screw connection completely.

DOBAU®- Terrassenband also acts as additional impact sound insulation between the timbers.

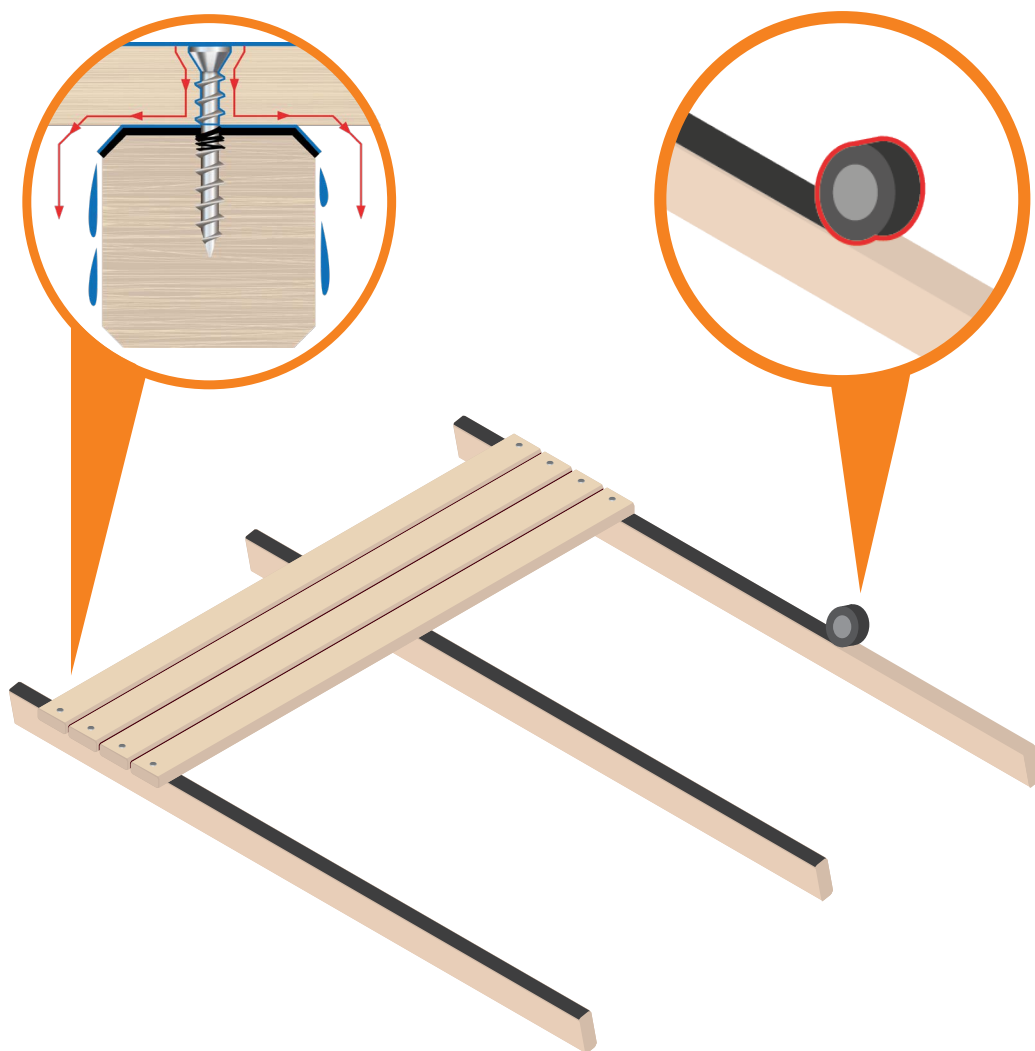

Central Sales

Dortmunder Gußasphalt GmbH & Co. KG

✉ Am Hafenbahnhof 10 ■ 44147 Dortmund ■ Germany

☎ +49 231 395797 - 37 @ info@dga.de 🌐 www.dga.de

Properties

DOBAU®- Terrassenband reliably adheres to wood, metal, plastics, and masonry.

It is characterised by the following features:

- easy application
- high flexibility
- impact sound-absorbing
- UV-resistant
- high adhesive strength
- subsequent self-sealing
- optimally adjusted to the width and length of the planks

Use

The surface must be abrasion-resistant, free of grease, and dust. Sharp edges should be removed if possible. After removing the release liner, DOBAU® Terrassenband can be applied to the substructure. The tape must then be firmly pressed into place, ideally with a rubber roller. The protruding ends of the tape are pressed vertically along the sides to provide the best possible surface protection. Avoid the formation of hollow spots and blisters.

Technical data

Thickness:	1.0 mm
Standard width:	80 mm
Standard length:	20 m
Optimal processing temperature:	+5 °C to +40 °C

Storage

The product should be protected from direct sunlight and stored between 5 °C and 40 °C. Rolls should also be stored in a dry place, standing on their cut edges. The product is not susceptible to frost. The properties of DOBAU®- Terrassenband remain unchanged for a long time. We recommend using the product within 24 months.

This product information corresponds to our latest available information. The processor is obliged to test the suitability and application options for the intended purpose. We shall be pleased to advise if you have any questions about our product. Our Terms and Conditions of Business apply, which can be found at www.dga.de.

Rev.: 01/25

Central Sales

Dortmunder Gußasphalt GmbH & Co. KG

✉ Am Hafenbahnhof 10 ■ 44147 Dortmund ■ Germany

☎ +49 231 395797 - 37 @ info@dga.de 🌐 www.dga.de