

Compressed air and suction gun SVV-70/560



Druckluft- und Ansaugpistole SVV-70/560



Application

The SVV-70/560 compressed air and suction gun is suitable for applying all PROXAN®- joint sealants in cans. A sturdy sealant in the can is drawn from the packaging into the gun cylinder with the aid of the filling plate. At the same time, a pourable sealant is filled directly from the packaging into the cylinder. The automatic cylinder venting (DGBM) immediately stops the flow of material when the compressed air supply is interrupted. Various plastic nozzles are available for individual application. The flow gun is also available with larger dimensions as a SVV-70/960 compressed air and suction gun with a higher joint sealant volume.

Features

- easy and convenient to use thanks to ergonomic handle
- automatic cylinder venting (DGBM) immediately stops the flow of material when the compressed air supply is interrupted
- sturdy, compact and effective design
- easy to maintain
- individual parts can be replaced within our modules

Technical data

Weight:	approx. 3150 g
Working pressure:	A material suction pressure of approx. 6-8 bar and an air volume of approx. 100 l/min are required
	Achievable vacuum: 75-80% Extrusion pressure: 3-6 bar
Cylinder:	Steel, d = 72 mm; l = 560 mm
Volume:	approx. 2000 ml

Servicing

All components that have come into contact with sealants must be cleaned thoroughly following each use. We recommend using PROXAN®- PR-S or PROXAN®- PR 4 cleaners for this purpose. Only bring the rubber seals into contact with solvents briefly.

System products

Joint sealants

- PROXAN®- KV 2
- PROXAN®- KV 2 R
- PROXAN®- KV 2 G-S
- PROXAN®- KV 3

Cleaner

- PROXAN®- PR-S
- PROXAN®- PR 4

Tools

- Filling plate for cans (Abfüllplatte für Dosen)

Central Sales

Dortmunder Gußasphalt GmbH & Co. KG

✉ Am Hafenbahnhof 10 ■ 44147 Dortmund ■ Germany


☎ +49 231 395797 - 37 @ info@dga.de 🌐 www.dga.de

Producer

Plant Greiz

Compressed air and suction gun SVV-70/560

Spare parts

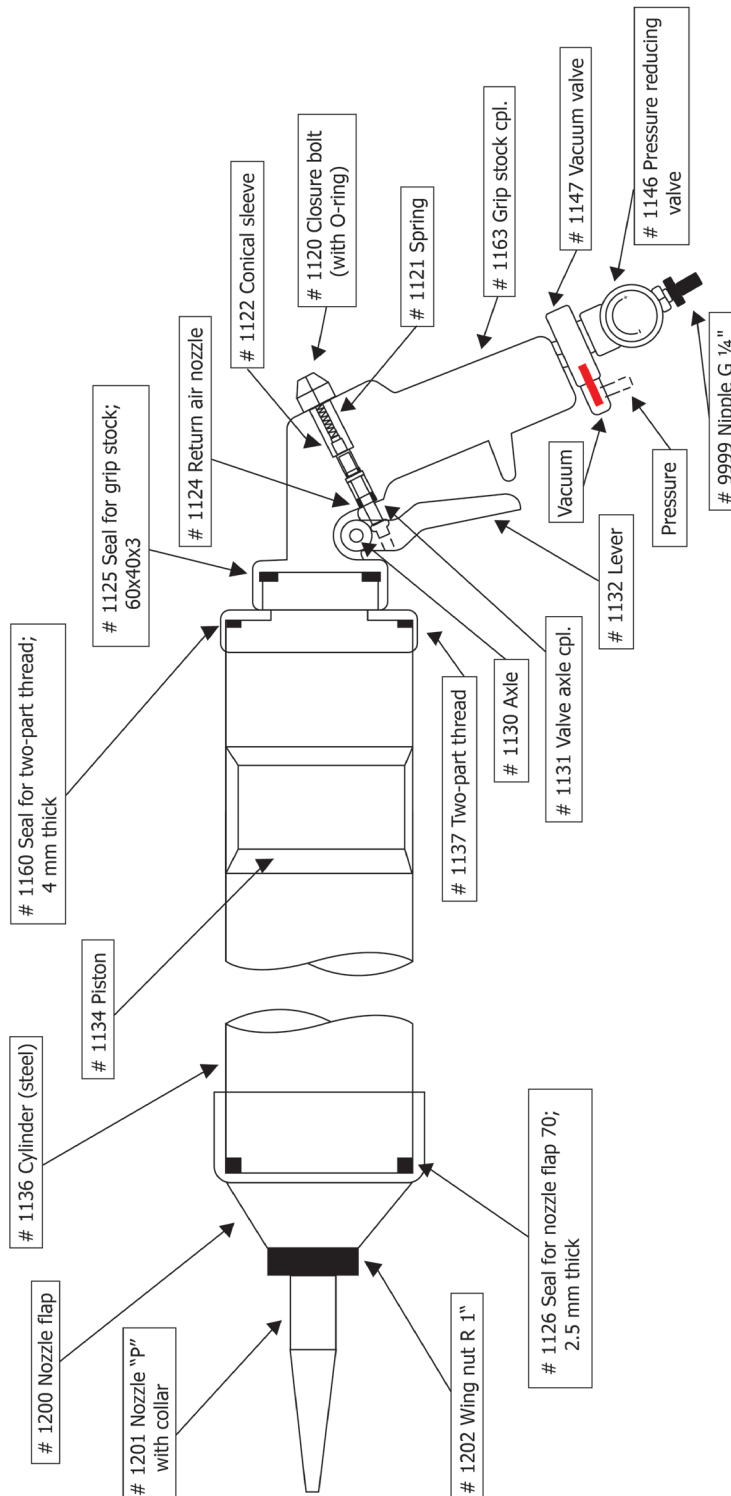

This product information corresponds to our latest available information. The processor is obliged to test the suitability and application options for the intended purpose. We shall be pleased to advise if you have any questions about our product. Our Terms and Conditions of Business apply, which can be found at www.dga.de.

Rev.: 02/20

Central Sales

Dortmunder Gußasphalt GmbH & Co. KG

Am Hafenbahnhof 10 ■ 44147 Dortmund ■ Germany

+49 231 395797 - 37 info@dga.de www.dga.de

Producer

Plant Greiz